

HIGH PERFORMANCE STEELS
FOR PUNCHING AND BLANKING

MADE-TO-MEASURE DIVERSITY FOR THE WORLD'S BEST

The requirements on **forming, cutting, punching and blanking tools** are constantly rising. Significantly longer service life is expected for tools today compared with just a few years ago, primarily due to continuously rising cost pressure. Consequently the requirements on tool steels are increasing.

BÖHLER offers a broad spectrum of made-to-measure products, along with essential expertise for application advice and coating technology.*

Depending on customer wishes and requirements profiles, we offer various options for the production of BÖHLER top grades with the following designations:

ISODUR

Cold work tool steels – ESR/PESR

ISOBLOC

Hot work tool steels – ESR/PESR

MICROCLEAN

Powder metallurgical steels


* Fa. Eifeler



© Corrode

COMPARATIVE OVERVIEW OF BÖHLER TOP GRADES

Property profiles of BÖHLER cold work tool steels with various manufacturing technologies

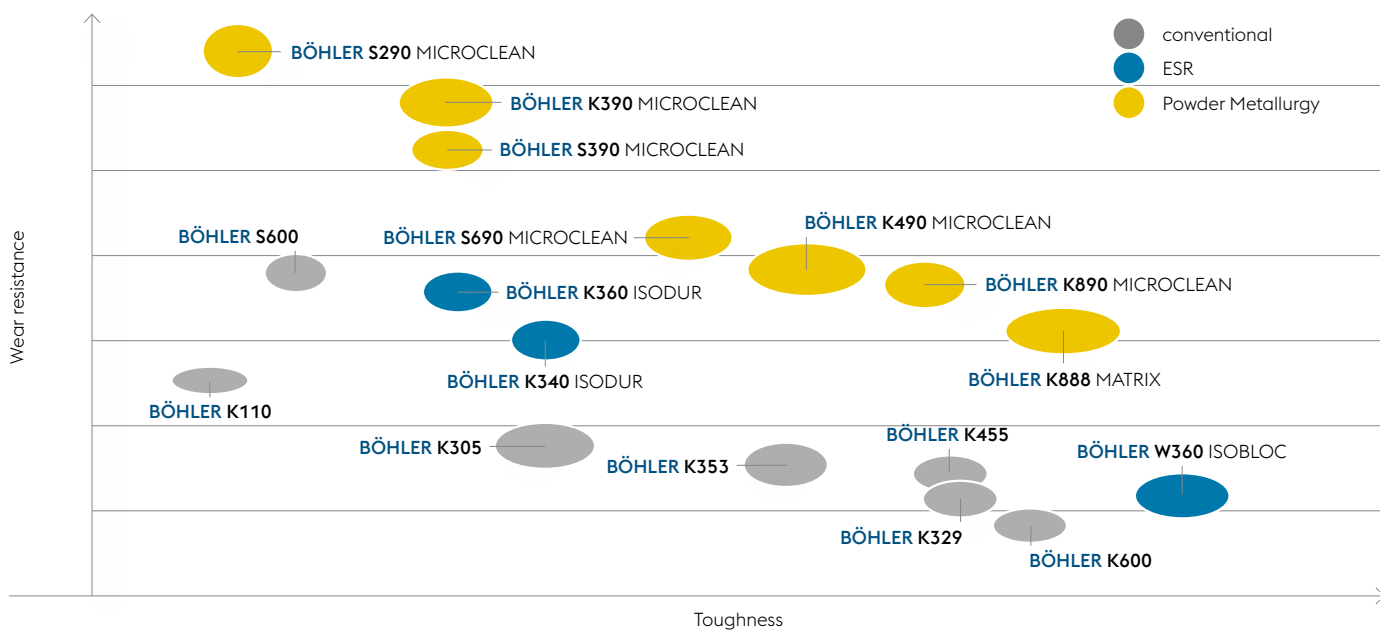

3 QUALITY LEVELS 3 TECHNOLOGIES


BASIC



Conventional production

Products made using the electric arc process are designated as conventionally melted materials and are the “basic materials” for ordinary loading, with the following primary properties:

- » Banded carbide distribution
- » Sufficient cleanliness

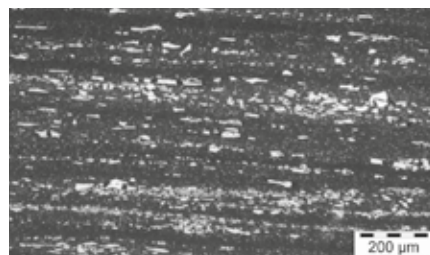

Micro structure of conventional 12% chromium steel


PREMIUM



ESR / PESR Manufacture

Products with improved properties can be produced using the ESR or PESR method. Using remelted materials leads to longer tool life due to:

- » High level of cleanliness
- » Low segregation
- » Larger bar dimensions can be produced with the same carbide distribution
- » Uniform dimensional changes
- » Improved toughness

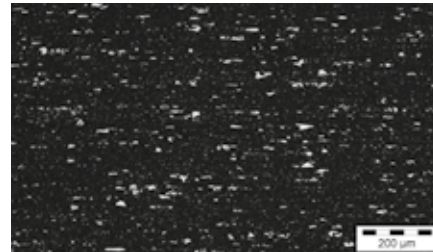

Microstructure of 8% chromium steel in ESR grade


SUPERIOR



Powder metallurgical production

Materials produced using powder metallurgy are increasingly being used to meet the most stringent requirements with various processing methods. These materials offer properties that meet demanding requirements:

- » No segregation
- » Extremely fine carbide distribution
- » Homogeneous properties
- » High wear resistance
- » Very good dimensional stability
- » High compressive strength
- » High toughness with high hardness

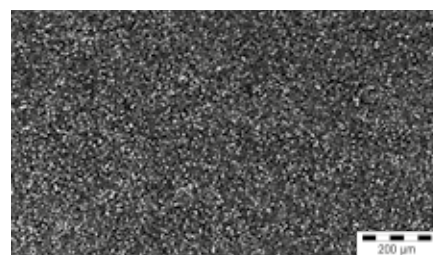

Microstructure of PM materials


CUTTING AND STAMPING – MATERIAL REQUIREMENTS

Detailed knowledge of the stress factors in the manufacturing process is needed for selecting a tool material with optimal properties for the process concerned. On the other hand, various damage mechanisms should also be taken into account.

In many cases, conventional tool materials are not able to cope with the extremely high stresses sometimes encountered and are therefore not able to achieve the desired lifetimes.

As a cost-effective alternative, BÖHLER offers a variety of latest-generation materials with performance features precisely aligned to the desired application. Consistently high cutting and stamping performance yield the desired productivity gains.

The significant factors for cutting and stamping include:

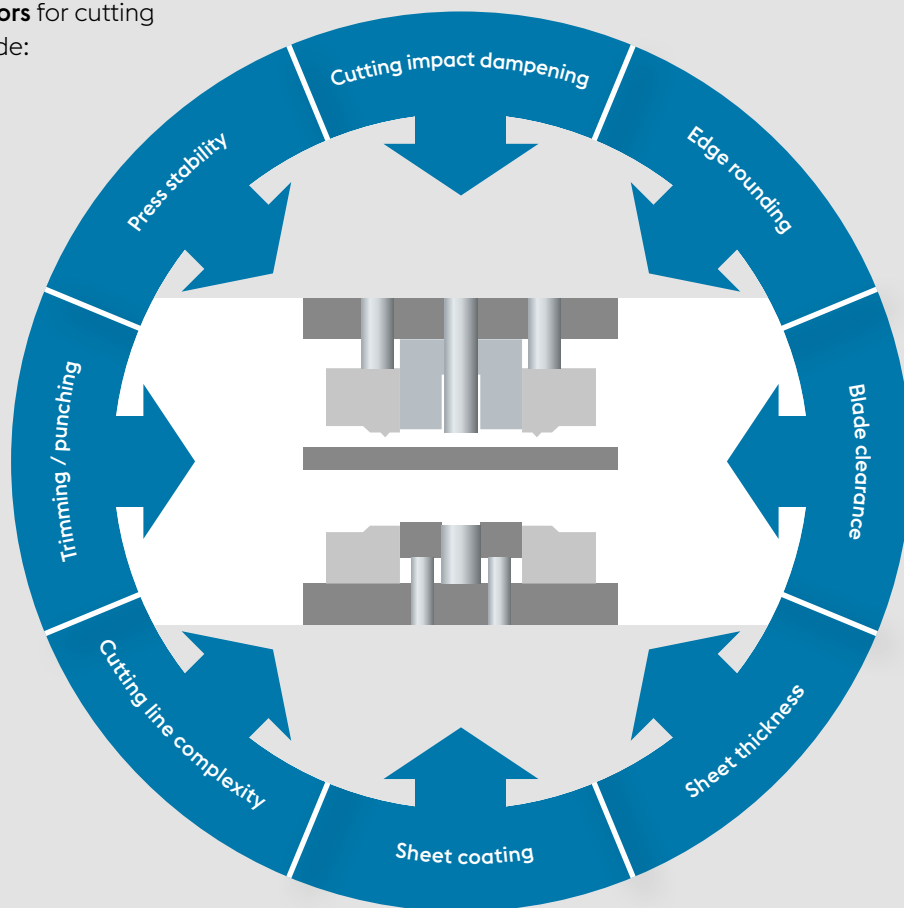

REQUIREMENTS PROFILE

Tool life for cold forming is limited by wear and fatigue, which can lead to considerable downtime costs. By selecting a specific combination of matrix and carbides and a suitable cleanliness grade, BÖHLER offers top grades with properties that achieve optimal results in the relevant application and/or under the relevant stress conditions.


In cold forming operations, 80% of all tool failures in the production of simple high-volume parts are caused by wear.

DAMAGE MECHANISMS AND THEIR AVOIDANCE

ABRASIVE WEAR

Abrasion means material removal by gouging, cutting or chipping where two materials are in contact. In the case of cold forming tools, this primarily takes the form of erosion of the matrix of the tool material. Carbides retard this process.

Abrasive wear – matrix erosion

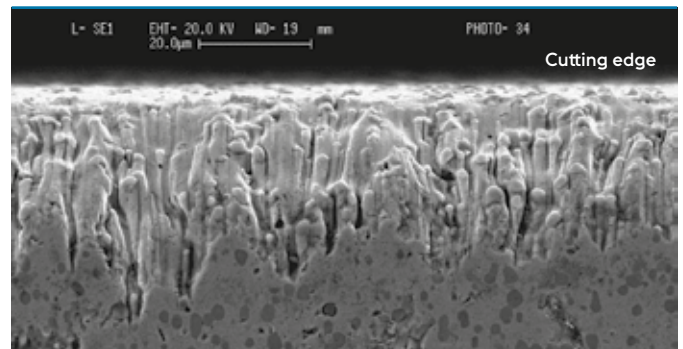


Potential solution:

Use a material with high carbide content and a high-strength matrix, such as BÖHLER K390 MICROCLEAN

ADHESIVE WEAR

Adhesion refers to the tendency to cold welding. Steels with high hardness and strength must be used to counter or prevent this tendency. The carbides embedded in the steel matrix reduce the tendency to adhesion, with a higher carbide content and more uniform carbide distribution both increasing the resistance to adhesive wear.

Adhesive wear – cold welding, material transfer

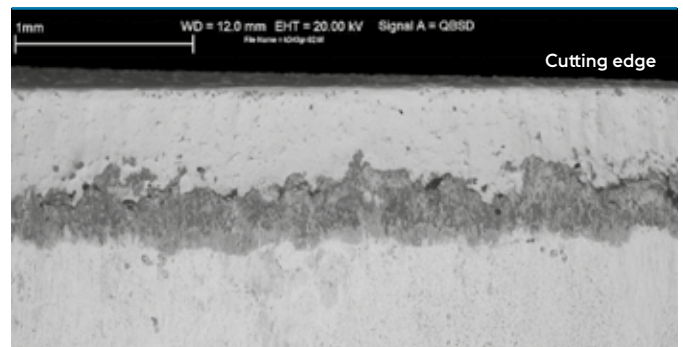

Potential solution:


Use a material with fine carbides, uniform distribution and a high-strength matrix, such as BÖHLER K340 ISODUR or use of coated tools




FATIGUE

Material fatigue means crack initiation and crack growth as a result of cyclic stress. Although tools for cold forming are usually pre-stressed under compression, fatigue fractures may occur under certain conditions, such as pressing operations.

Fatigue – spalling & plastic deformation



Tangential cracks



Edge chipping due to cyclic plastic deformation

Potential solution:

Use a material with fine, uniformly distributed carbides, high compressive strength and high purity, such as **BÖHLER S390 MICROCLEAN**

GOOD TO KNOW

Requirements for tool materials are becoming more demanding and more complex.

With expert product advice and a comprehensive product spectrum, BÖHLER is able to offer solutions individually tailored to your specific requirements and problems. The decision to use high-quality materials for your tooling often pays off quickly, since the material component of high-performance tooling often represents only 5% of the total value.

Cost-effectiveness result from:

- » Better machining characteristics
- » Longer life
- » Lower maintenance costs
- » Fewer tools
- » Less downtime

In short:

BY USING RELIABLE TOOL MATERIALS, YOU SAVE TIME AND MONEY AND IMPROVE YOUR COMPETITIVENESS.




THE FULL DIVERSITY AT A GLANCE

CORE PRODUCTS

BÖHLER grade	Chemical composition (nominal in wt.%)						Standards	
	C	Cr	Mo	V	W	Others	DIN / EN	AISI
BÖHLER K100	2.00	11.50	-	-	-	-	1.2080 X210Cr12	~ D3
BÖHLER K110	1.55	11.50	0.75	0.75	-	-	1.2379 X155CrVMo12-1	D2
BÖHLER K305	1.00	5.20	1.10	0.25	-	-	1.2363 X100CrMoV5-1	A2
BÖHLER K353	0.82	8.00	1.60	0.60	-	+ Al	Patented	-
BÖHLER K455	0.63	1.10	-	0.18	2.00	-	1.2550 60WCrV7	~ S1
BÖHLER K600	0.45	1.30	0.25	-	-	Ni = 4.00	1.2767 45NiCrMo16	-
BÖHLER S600	0.90	4.10	5.00	1.80	6.40	-	1.3343 HS6-5-2	~ M2 reg.C
BÖHLER S630	0.95	4.00	4.00	2.00	4.00	+ Al	1.3330 HS4-4-2	-

BÖHLER grade	Chemical composition (nominal in wt.%)						Standards	
	C	Cr	Mo	V	W	Others	DIN / EN	AISI
BÖHLER K340 ISODUR	1.10	8.30	2.10	0.50	-	+ Al + Nb	Patented	-
BÖHLER K360 ISODUR	1.25	8.75	2.70	1.18	-	+ Al + Nb	Patented	-
BÖHLER W360 ISOBLOC	0.50	4.50	3.00	0.55	-	-	Patented	-

BÖHLER grade	Chemical composition (nominal in wt.%)						Standards	
	C	Cr	Mo	V	W	Others	DIN / EN	AISI
BÖHLER K390 MICROCLEAR	1.10	8.30	2.10	0.50	-	+ Al + Nb	Patented	-
BÖHLER K490 MICROCLEAR	1.25	8.75	2.70	1.18	-	+ Al + Nb	Patented	-
BÖHLER K890 MICROCLEAR	0.50	4.50	3.00	0.55	-	-	Patented	-
BÖHLER S290 MICROCLEAR	2,00	3,75	2,50	5,00	14,30	Co = 11,00	Eigenpatent	-
BÖHLER S390 MICROCLEAR	1,60	4,80	2,00	5,00	10,50	Co = 8,00	-	-
BÖHLER S690 MICROCLEAR	1,33	4,30	4,90	4,10	5,90	-	-	~ M4
BÖHLER K888 MATRIX	0,60	4,40	2,80	1,10	2,45	Co=3,80	Eigenpatent	-

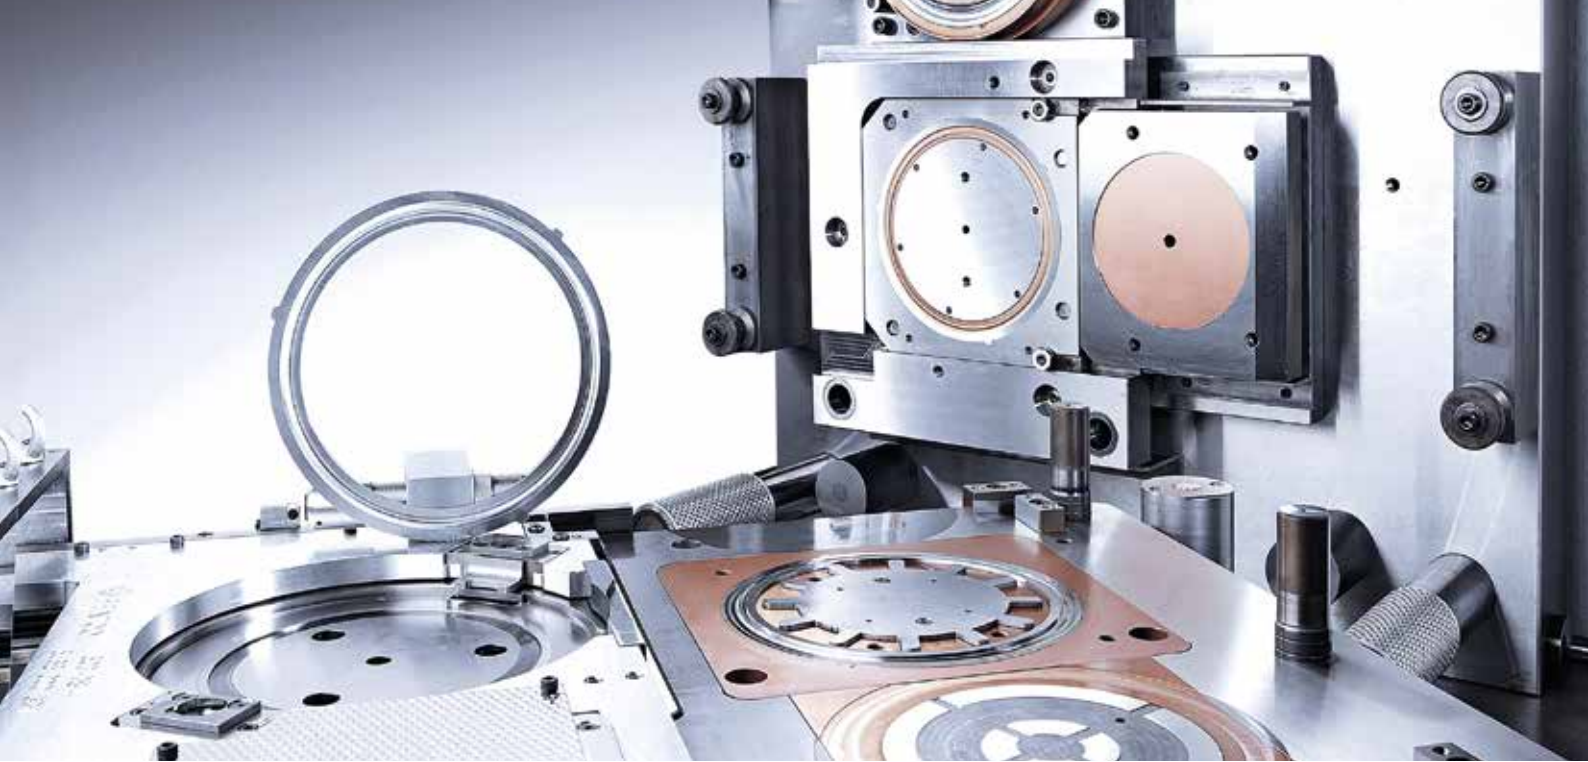

BÖHLER grade	Wear resistance abrasive	Wear resistance adhesive	Toughness	Compressive strength	Dimensional stability during heat treatment
BÖHLER K100	★★★	★	★	★	★★
BÖHLER K110	★★★	★	★	★★	★★
BÖHLER K305	★	★	★★★★	★	★
BÖHLER K340 ISODUR	★★★	★★★★	★★★	★★★	★★★
BÖHLER K353	★★	★★★	★★★★★	★★	★★
BÖHLER K360 ISODUR	★★★★	★★★★	★★	★★★	★★★
BÖHLER K390 MICROCLEAN	★★★★★	★★★★★	★★★★	★★★★	★★★★
BÖHLER K490 MICROCLEAN	★★★★	★★★★	★★★★★	★★★	★★★★
BÖHLER K888 MATRIX	★★	★★	★★★★★	★★★★	★★★★★
BÖHLER K890 MICROCLEAN	★★★	★★★	★★★★★	★★★	★★★★
BÖHLER K455	★	★	★★★★★	★	★
BÖHLER K600	★	★	★★★★★	★	★
BÖHLER S600	★★★★	★★	★	★★★	★★
BÖHLER S630	★★	★★★	★★	★★★	★★
BÖHLER S290 MICROCLEAN	★★★★★	★★★★★	★★	★★★★★	★★★★
BÖHLER S390 MICROCLEAN	★★★★★	★★★★	★★★	★★★★	★★★★
BÖHLER S690 MICROCLEAN	★★★★	★★★	★★★★	★★★	★★★★
BÖHLER W360 ISOBLOC	★	★	★★★★★	★	★★

Note:

The rating of the properties is based solely on stamping and cutting applications and the steels listed here. Comparative ratings are strongly dependent on specific heat treatment. For detailed advice on material selection, please consult your voestalpine BÖHLER dealer.

PROFITABLE MATERIAL RECOMMENDATIONS

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRC	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Steel sheet, plate & strip, aluminium and aluminium alloys, copper and copper alloys with tensile strength up to 600 MPa	up to 3 mm	BÖHLER K110	60	62
		BÖHLER K340 ISODUR	60	63
		BÖHLER K360 ISODUR	61	63
		BÖHLER K390 MICROCLEAN	62	64
		BÖHLER S600	60	63
	3 – 6 mm	BÖHLER K110	58	62
		BÖHLER K305	58	62
		BÖHLER K340 ISODUR	60	62
		BÖHLER K353	60	62
		BÖHLER K360 ISODUR	60	62
		BÖHLER K390 MICROCLEAN	61	63
		BÖHLER W360 ISOBLOC	55	57
		BÖHLER K490 MICROCLEAN	62	64
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAN	61	63
		BÖHLER S600	59	62
		BÖHLER S630	59	62
		6 – 12 mm	BÖHLER K340 ISODUR	58
	BÖHLER K353		60	62
	BÖHLER K390 MICROCLEAN		60	62
	BÖHLER W360 ISOBLOC		54	56
	BÖHLER K455		52	56
	BÖHLER K490 MICROCLEAN		61	63
	BÖHLER K888 MATRIX		61	63
	BÖHLER K890 MICROCLEAN		60	62
	over 12 mm	BÖHLER K353	58	60
		BÖHLER W360 ISOBLOC	50	54
		BÖHLER K490 MICROCLEAN	58	60
		BÖHLER K600	52	54
		BÖHLER K888 MATRIX	61	63
BÖHLER K890 MICROCLEAN		58	60	

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Steel sheet/plate & strip and metal alloys with tensile strength of 600 to 1000 MPa	up to 3 mm	BÖHLER K110	58	62
		BÖHLER K340 ISODUR	60	62
		BÖHLER K360 ISODUR	60	62
		BÖHLER K390 MICROCLEAN	61	63
		BÖHLER S600	59	62
		BÖHLER S630	59	62
	3 – 6 mm	BÖHLER K110	56	60
		BÖHLER K340 ISODUR	58	60
		BÖHLER K360 ISODUR	58	60
		BÖHLER K390 MICROCLEAN	60	62
		BÖHLER K490 MICROCLEAN	60	62
		BÖHLER K888 MATRIX	61	63
	6 – 12 mm	BÖHLER K340 ISODUR	54	56
		BÖHLER K353	58	60
		BÖHLER K390 MICROCLEAN	58	60
		BÖHLER W360 ISOBLOC	52	54
		BÖHLER K455	50	54
		BÖHLER K490 MICROCLEAN	58	60
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAN	58	60
	over 12 mm	BÖHLER K353	57	59
		BÖHLER W360 ISOBLOC	52	54
		BÖHLER K455	48	52
		BÖHLER K490 MICROCLEAN	58	60
BÖHLER K600		48	52	

PROFITABLE MATERIAL RECOMMENDATIONS

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Precision blanking tools for metallic sheets and strips	up to 4 mm	BÖHLER K110	60	62
		BÖHLER K305	60	61
		BÖHLER K340 ISODUR	61	63
		BÖHLER K353	60	62
		BÖHLER K360 ISODUR	61	63
		BÖHLER K390 MICROCLEAN	62	64
		BÖHLER K490 MICROCLEAN	62	64
		BÖHLER S290 MICROCLEAN	63	67
		BÖHLER S390 MICROCLEAN	62	64
		BÖHLER S600	60	62
		BÖHLER S630	60	62
	BÖHLER S690 MICROCLEAN	60	62	
	4 - 8 mm	BÖHLER K110	58	60
		BÖHLER K305	58	60
		BÖHLER K340 ISODUR	60	62
		BÖHLER K353	60	62
		BÖHLER K360 ISODUR	60	62
		BÖHLER K390 MICROCLEAN	61	63
		BÖHLER K490 MICROCLEAN	61	63
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAN	60	63
BÖHLER S390 MICROCLEAN		61	64	
BÖHLER S600	59	62		
BÖHLER S630	59	62		
BÖHLER S690 MICROCLEAN	60	62		

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Precision blanking tools for metallic sheets and strips	8 - 12 mm	BÖHLER K340 ISODUR	58	60
		BÖHLER K360 ISODUR	58	60
		BÖHLER K390 MICROCLEAR	60	62
		BÖHLER K490 MICROCLEAR	60	62
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	59	62
		BÖHLER W360 ISOBLOC	54	56
		BÖHLER S390 MICROCLEAR	60	63
		BÖHLER S600	58	62
		BÖHLER S630	58	62
	BÖHLER S690 MICROCLEAR	58	62	
	over 12 mm	BÖHLER W360 ISOBLOC	50	54
		BÖHLER K490 MICROCLEAR	58	62
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	58	62
		BÖHLER S690 MICROCLEAR	58	62

PROFITABLE MATERIAL RECOMMENDATIONS

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc		
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets	
Sheets and strips for dynamos and transformers (highly abrasive)	up to 1 mm	BÖHLER K100	63	65	
		BÖHLER K110	60	62	
		BÖHLER K360 ISODUR	61	63	
		BÖHLER K390 MICROCLEAN	62	64	
		BÖHLER K490 MICROCLEAN	62	64	
		BÖHLER S290 MICROCLEAN	63	68	
		BÖHLER S390 MICROCLEAN	62	66	
		BÖHLER S690 MICROCLEAN	62	64	
	1 – 3 mm	BÖHLER K360 ISODUR	59	62	
		BÖHLER K390 MICROCLEAN	61	63	
		BÖHLER K490 MICROCLEAN	60	63	
		BÖHLER S390 MICROCLEAN	61	63	
	3 – 6 mm	BÖHLER K340 ISODUR	58	60	
		BÖHLER K390 MICROCLEAN	60	62	
		BÖHLER K490 MICROCLEAN	60	63	
		BÖHLER K888 MATRIX	61	63	
		BÖHLER K890 MICROCLEAN	60	63	
		BÖHLER S390 MICROCLEAN	60	62	
	Austenitic steels	up to 3 mm	BÖHLER K340 ISODUR	60	62
			BÖHLER K353	60	62
			BÖHLER K360 ISODUR	60	63
BÖHLER K390 MICROCLEAN			62	64	
BÖHLER K490 MICROCLEAN			62	64	
BÖHLER S390 MICROCLEAN			63	65	
BÖHLER S600			61	63	
BÖHLER S690 MICROCLEAN			61	63	



Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Austenitic steels	3 – 6 mm	BÖHLER K340 ISODUR	58	60
		BÖHLER K353	59	61
		BÖHLER K390 MICROCLEAR	61	63
		BÖHLER K490 MICROCLEAR	61	63
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	60	63
		BÖHLER S390 MICROCLEAR	60	64
		BÖHLER S690 MICROCLEAR	60	62
	6 – 12 mm	BÖHLER K340 ISODUR	56	58
		BÖHLER K353	58	60
		BÖHLER W360 ISOBLOC	54	56
		BÖHLER K390 MICROCLEAR	58	60
		BÖHLER K490 MICROCLEAR	59	61
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	60	62
		BÖHLER S390 MICROCLEAR	58	60
	over 12 mm	BÖHLER K353	57	59
		BÖHLER W360 ISOBLOC	54	56
		BÖHLER K490 MICROCLEAR	58	60
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	58	60
		BÖHLER S690 MICROCLEAR	58	60

MACHINING OF HIGH-STRENGTH AND ULTRA HIGH-STRENGTH SHEETS

APPLICATION

The share of high-strength and ultra high-strength sheet metal in vehicle construction is strongly rising. BÖHLER offers a broad spectrum of grades to provide the optimum solution for demanding machining tasks


■ Low-strength steels: Mild steels	29%
■ High-strength steels (HSS): High-strength interstitial-free steels (HSIF), Bake hardening steels (BH), High-strength low alloy steels (HSLA)	28%
■ Advanced high-strength steels (AHSS): Dual phase steels (DP), Transformation induced plasticity steels (TRIP)	13%
■ Stainless steels: Austenitic stainless steels	
■ Ultra high-strength steels (UHSS): Complex phase steels (CP), Martensitic steels (MS)	
■ Press hardened steels (PHS)	11%
■ Aluminium sheets: 7xxx series	
■ Aluminium sheets: 6xxx series	14%
■ Aluminium sheets: 5xxx series	
■ Aluminium extrusion profiles	3%
■ Cast aluminium	2%

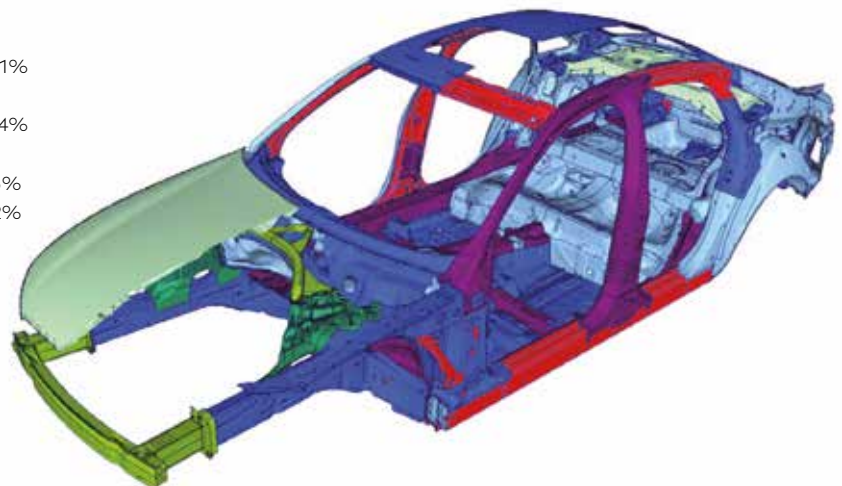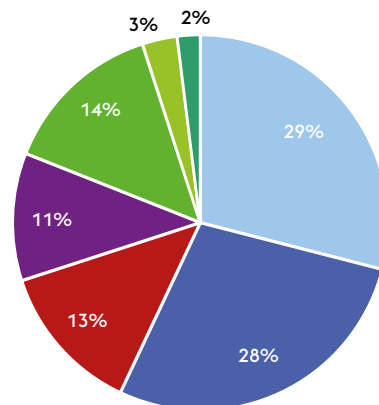



MATERIALS FOR CUTTING, PUNCHING AND BLANKING HIGH-STRENGTH AND ULTRA-HIGH STRENGTH SHEETS

Tool steels – sheet materials

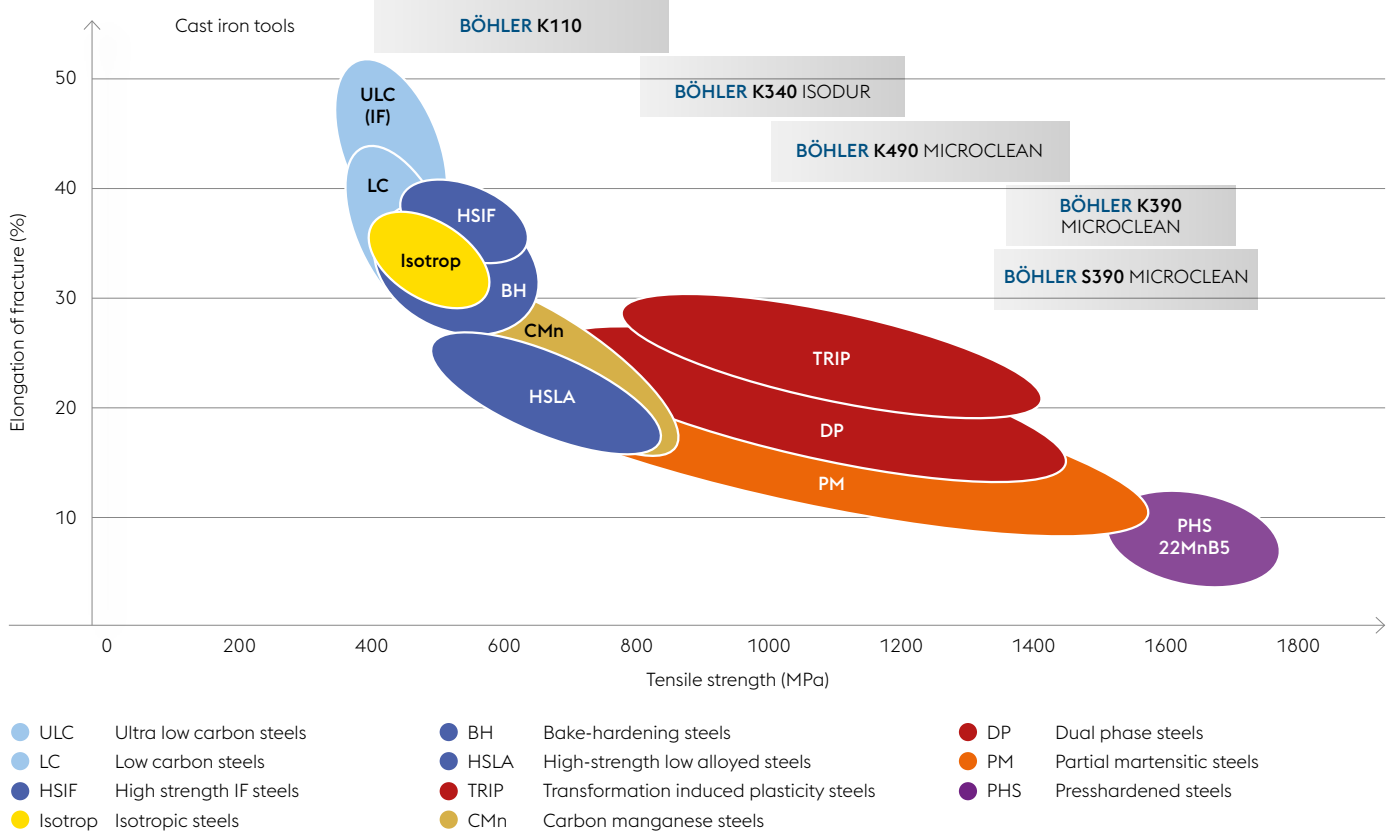

PROFITABLE MATERIAL RECOMMENDATIONS

Material to be cut	Material thickness	BÖHLER grade	Standard hardness of punches and dies in HRc	
			Complex shapes and/or thick sheets	Simple shapes and/or thin sheets
Steel sheet/plate and strip and metal alloys with tensile strengths over 1000 MPa	up to 2 mm	BÖHLER K340 ISODUR	60	62
		BÖHLER K360 ISODUR	60	62
		BÖHLER K390 MICROCLEAR	62	64
		BÖHLER K490 MICROCLEAR	62	64
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	60	64
		BÖHLER S390 MICROCLEAR	62	64
		BÖHLER S600	60	62
	over 2 mm	BÖHLER K340 ISODUR	58	60
		BÖHLER W360 ISOBLOC	55	57
		BÖHLER K490 MICROCLEAR	60	62
		BÖHLER K888 MATRIX	61	63
		BÖHLER K890 MICROCLEAR	60	64
		BÖHLER S390 MICROCLEAR	60	62
		BÖHLER S600	60	62
		BÖHLER S690 MICROCLEAR	60	64

The formability and ductility of all of the materials mentioned above decrease with increasing hardening phases.





Heat recovery

FOCUS ON THE ENVIRONMENT

THE SPECIAL STEEL PLANT OF VOESTALPINE BÖHLER EDELSTAHL IS ALSO THE MOST MODERN IN THE WORLD WHEN IT COMES TO ENVIRONMENTAL PROTECTION. THE USE OF RENEWABLE ENERGY, SUSTAINABLE HEAT UTILIZATION, AND EFFECTIVE EMISSION PROTECTION ARE CRUCIAL.

HEAT CIRCUIT


When you produce 205,000 tons of high-performance materials every year, you use a lot of heat. When an electric arc generates the heat of a sun to melt down raw materials, the molten steel reaches temperatures of up to 1,800 °C.

Water is still the method of choice for cooling these systems. In order to conserve this important natural resource, voestalpine BÖHLER Edelstahl works with a modern heat recovery and waste heat concept. Thanks to a closed cooling circuit, cooling water withdrawal and return in the new special steel plant are reduced by 90% compared to its predecessor.

PASSING ON WARMTH

Heat is a valuable source of energy. The vacuum AOD converter and the electric arc furnace are equipped with a heat recovery system. The energy content of the cooling water can be used to generate a heat output of up to 12.5 MW.

For this purpose, a 1,500 m long truss connects the new special steel plant with the central boiler house. From here, the heat is passed on to internal consumers and local energy providers. This saves up to 20 GWh of district heating per year and reduces CO₂ emissions by over 4,000 tons.

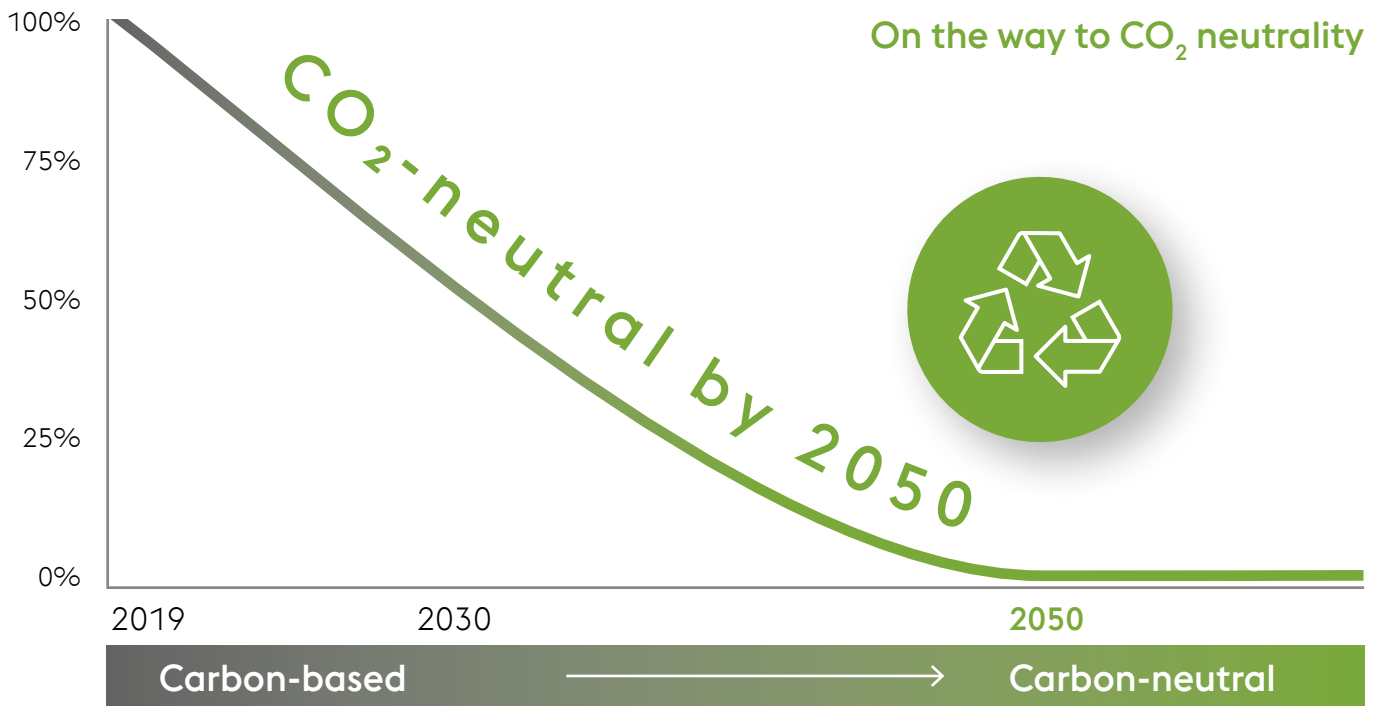

A big plus in terms of environmental protection at the new high-tech special steel plant in Kapfenberg is the use of 100% green electricity to operate the electric arc furnace, the core of the plant.

A comprehensive package of measures also contributes to conservation of resources and protects the environment, local residents, and employees.

Special attention was paid to environmental protection right from the planning stage.

The air and wastewater treatment systems are state of the art, meeting the strictest of environmental requirements.

High-performance heat recovery systems also help to reduce emissions.

COOLING WITH HEAT

In the new special steel plant, equipment such as computer systems and control stations has to be cooled. By using absorption technology, cooling is obtained from the plant's internal heat supply.

This process renders electrically operated compression units superfluous. An absorption cooling system offers the lowest operating costs, requires little maintenance, and generates no additional CO₂ emissions while consuming hardly any electricity.

QUIET AND CLEAN

To ensure that the noise of individual processes – like the electric arc used in the melting process – does not become a burden, voestalpine minimizes the noise of feeding, tapping, and extraction systems with the most efficient sound-absorbing cladding and insulation. Every hour, dust is removed from 3.8 million m³ of exhaust air. This reduces the amount of dust produced by the new plant by 75%.

A highly digitalized process control system ensures that the blower output is regulated in line with the process. This means that in the new special steel plant, it is linked to the production situation, e.g. the feeding and tapping operation.

FOCUS ON RESPONSIBILITY

Strategic focuses of voestalpine BÖHLER Edelstahl

SUSTAINABLE PRODUCTS

We work on the development and production of sustainable special steel that offers ecological, social and economic advantages while at the same time protecting public health and the environment over its entire life cycle from raw material extraction to its eventual disposal.



SUSTAINABLE TRANSPORTATION

We are gradually upgrading our vehicle fleet to e-mobility, investing in e-mobility infrastructure, optimizing our delivery logistics, and supporting “soft mobility” for our workforce (sustainable, environmentally friendly, socially acceptable and low-accident modes of transportation such as walking, cycling, and the use of public transit).



SUSTAINABLE OPERATION



We integrally accept our corporate responsibility: We deploy the best available technologies in our production facilities, and we continuously pursue higher efficiency, lower emissions, resource conservation and lower energy consumption in the framework of our existing steel production.



SUSTAINABLE SUPPLY CHAIN



We practice active supply chain management. The social and environmental impacts and risks of suppliers' activities are systematically collected, evaluated, and taken into account in supplier development.



SOCIAL RESPONSIBILITY

BÖHLER has set an example for social responsibility since its foundation in 1870 by the Böhler brothers, who saw it as a mission for all future generations. We take our obligation seriously to deal consciously with the diversity, achievements and potential of our employees, society and other organizations.

The data contained in this brochure is merely for general information and therefore shall not be binding on the company. We may be bound only through a contract explicitly stipulating such data as binding. The manufacture of our products does not involve the use of substances detrimental to health or to the ozone layer.



voestalpine BÖHLER Edelstahl GmbH & Co KG

Mariazeller Straße 25

8605 Kapfenberg, Austria

T. +43/50304/20-0

E. info@bohler-edelstahl.at

www.voestalpine.com/bohler-edelstahl

voestalpine

ONE STEP AHEAD.